


G370S



GLOBAL DISPLAY SOLUTIONS

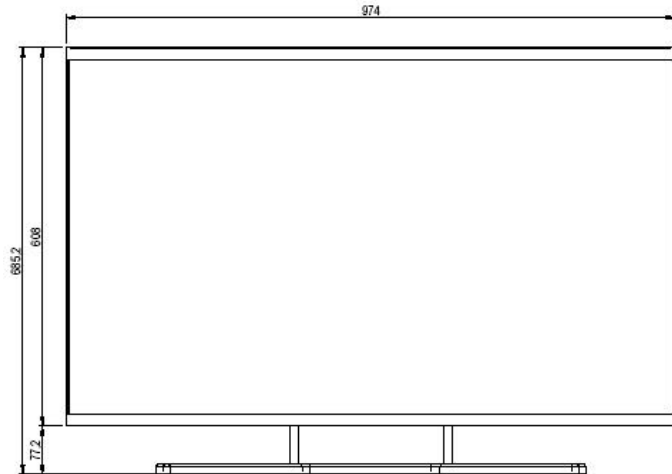

37" LCD

technical specifications

Display

Active Area	819.60 x 460.80 mm
Pixel Resolution	1366 x 768 x 3
Pixel Pitch	0.6 mm
Brightness	500 cd/m2 typ
Contrast	800:1
Response Time	15 msec typ
H Viewing Angle	170° typical CR>10
V Viewing Angle	170° typical CR>10

Input Signals

Composite Video, S-Video
Analog RGB, DVI, CVBS

Video Functions

Picture & Picture, Mirror, Freeze

Timing

H Frequency	15kHz to 100 kHz
V Frequency	50 Hz to 120 Hz
Pixel Clock	200 MHz

Power

Power Input	110 Vac/60 Hz @2,8 Amp Max 230 Vac/50 Hz @1,4 Amp Max
-------------	----------------------------------------------------------

Power Consumption

300 W typ

Controls

IR Remote control & Local

Keypad (via OSD)

RS232/RS485/RS422

Remote data transfer by

Ethernet (10/100MB)

Automatic ambient light control

Approvals

CE & cULus

Temperature

0 to +40° C

Dimensions

W 974 x H 608 x D 160 mm


Backlight life

60.000 hours minimum

Mechanical

Laminated safety glass

Vesa mounting holes



GDS Europe

T +39 (0445) 428991
F +39 (0445) 428992
email europe@gds.com

GDS America

T +1 (815) 282 2328
F +1 (815) 282 0297
email america@gds.com

GDS Asia

T +886 (2) 2298-1480
F +886 (2) 2298-1131
email asia@gds.com