


## G6500001

### technical specifications

Active area size (W x H)	65" (1428 x 804 mm)
Pixel pitch (mm)	0.744(H) x 0.744(V)
Panel resolution (pixels)	1920 x 1080
Supported video resolutions	Customizable up to 1920x1080 @ 60Hz
Luminance of white	400 cd/m2 (Typ)
Contrast ratio	TBD
Response time (gtg)	12 ms (Typ)
Colour Range	16.7 Million colours (max)
Viewing angle	170(H) 170 (V) typ. with CR ≥10
Video inputs	DVI-D; VGA; S-Video; CVBS
Remote diagnostic functionalities (via RS232)	Yes
Auto Brightness Control	Yes
Front glass type	Optically bonded laminated AR glass (removable)
Impact Damage protection	EN356-P3A (Glass) IK-8 (Housing)
IP Class	IP65
Operating temperature range	TBD
Storage Temperature	TBD
Certifications	TBD
RoHS	Yes
CCFL Life Time	60K hrs (Typ)
Input voltage	90 – 265 Vac
Power consumption	TBD
Weight	TBD Note: 4 fixing points side by side are available for wall/stand mounting
External dimensions (W x H x D)	1678 x 992 x 232 mm Notes: to guarantee a proper functionality, 10cm of clearance must be kept around the display
Portrait version	Please contact GDS for details
Available Accessories	IR Remote Control and VGA cable (included) Serial Cable and Ethernet Cable (not included)
Options	Custom Embedded PC's (Please contact GDS for details)
Customization	Please contact GDS for available options

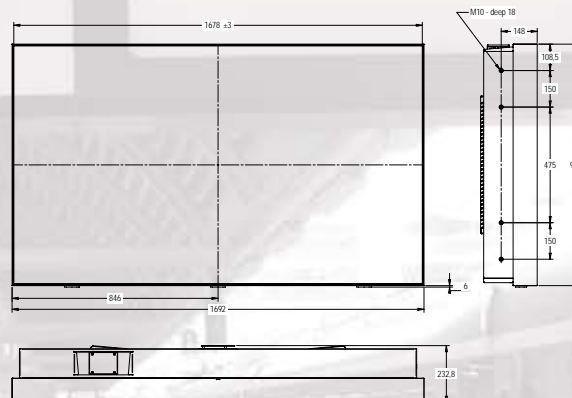

#### GDS Europe

T +39 (0445) 428991  
F +39 (0445) 428992  
email [europe@gds.com](mailto:europe@gds.com)

#### GDS America

T +1 (815) 282 2328  
F +1 (815) 282 0297  
email [america@gds.com](mailto:america@gds.com)

#### GDS Asia

T +886 (2) 2298-1480  
F +886 (2) 2298-1131  
email [asia@gds.com](mailto:asia@gds.com)